

352



PN25

Valvole a sfera di intercettazione a squadra femmina/femmina con dado girevole per contatori acqua

Female/female angle shut-off ball valves with swivel nut for water meters

MADE IN ITALY



NON NICHELATE
NOT NICKEL-PLATED



Valvola di intercettazione (ON-OFF) per contatori acqua (adatta al consumo di acqua potabile secondo le recenti normative Europee).

Shut-off valve (ON-OFF) for water meters (suitable for drinking water consumption according to recent European regulations).

Pressione di esercizio: 25 bar

Temperatura di esercizio: -20°C +130°C (gelo escluso)

Filetti cilindrici secondo norma ISO 228-1

Tenuta sull'asta: 1/2" - 3/4" asta assemblata dall'interno con 2 OR in EPDM PEROX

Tenuta sulla sfera con 2 sedi in PTFE


Working pressure: 25 bar

Working temperature: -20°C +130°C (no frost)

Cylindrical threads according to ISO 228-1

Seal on the stem: 1/2" - 3/4" stem assembled from inside with 2 EPDM PEROX OR.

Seal on the ball with 2 PTFE gaskets

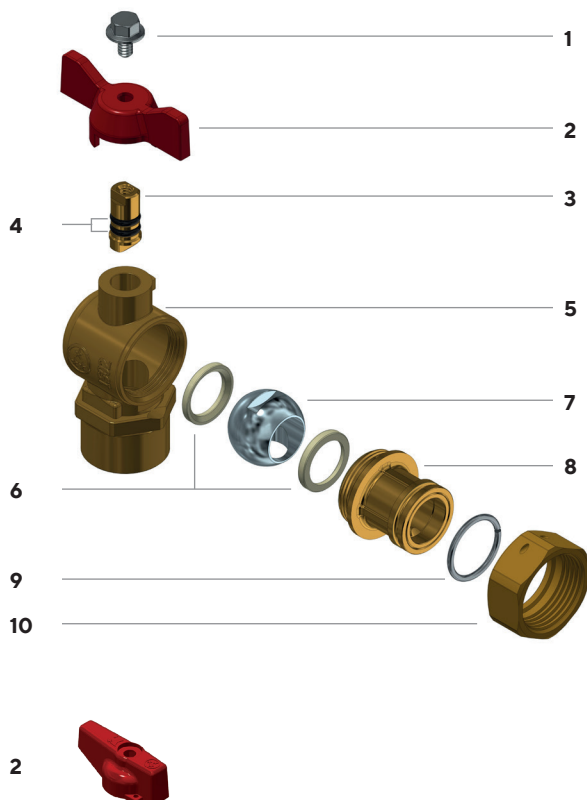


- 1 Vite in acciaio AISI 430
- 2 Con farfalla in alluminio "T" o manopola in alluminio
- 3 Asta in CW614N EN 12164
- 4 O-ring in EPDM PEROX
- 5 Corpo valvola CW617N UNI EN 12165
- 6 Sede in PTFE
- 7 Sfera in CW617N UNI EN 12165 cromata
- 8 Manicotto in CW617N EN 12165
- 9 Anello elastico in acciaio
- 10 Dado CW617N UNI EN 12165



- 1 AISI 430 steel screw
- 2 With aluminium "T" handle or aluminium knob
- 3 CW614N UNI EN 12164 stem
- 4 EPDM PEROX O-ring
- 5 CW617N UNI EN 12165 body valve
- 6 PTFE gasket
- 7 CW617N EN 12165 chrome plated ball
- 8 CW617N EN 12165 end adaptor
- 9 Steel elastic ring
- 10 CW617N UNI EN 12165 nut




Con farfalla in alluminio "T"
With aluminium "T" handle

ACQUA POTABILE
DRINKING WATER

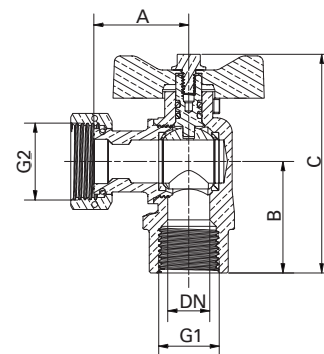




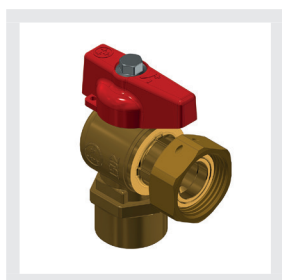Attacchi Connections		Codice prodotto Product code		PN	DN	A ±0,5 mm	B ±0,2 mm	C mm	Conf. num. pezzi Pack. num. pieces
G1	G2								
1/2"	1/2"	352D1/2J6R1/2	352D1/2J6B1/2	25	15	34,75	38,3	75	10/120
1/2"	3/4"	352D1/2J6R3/4	352D1/2J6B3/4	25	15	32,65	38,3	75	10/120
3/4"	3/4"	352E3/4J6R3/4	352E3/4J6B3/4	25	15	32,65	34	72,5	10/120



Con manopola in alluminio
With aluminium knob

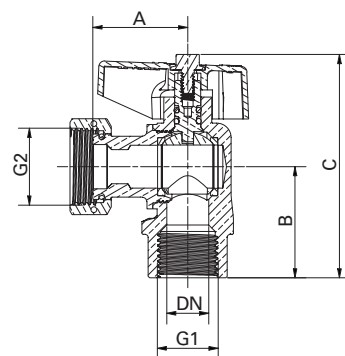ACQUA POTABILE
DRINKING WATER



Attacchi Connections		Codice prodotto Product code		PN	DN	A ±0,5 mm	B ±0,2 mm	C mm	Conf. num. pezzi Pack. num. pieces
G1	G2								
1/2"	1/2"	352D1/2J2R1/2	352D1/2J2B1/2	25	15	34,75	38,3	73	10/120
1/2"	3/4"	352D1/2J2R3/4	352D1/2J2B3/4	25	15	32,65	38,3	73	10/120
3/4"	3/4"	352E3/4J2R3/4	352E3/4J2B3/4	25	15	32,65	34	70,5	10/120